

L07RS-L290RS (7-290 KW) VARIABLE-SPEED ROTARY SCREW COMPRESSORS

LRS-Series



Advanced Technology Inspired Simplicity

A Better Approach

Gardner Denver has a long history of manufacturing compressed air equipment. With our LRS-Series line of products, we have uniquely combined simplicity with cutting edge design. The result—a compressor that delivers outstanding performance with unprecedented serviceability.

The Total Package

Gardner Denver has the total package—extensive compressor and air treatment product lines, sales and service support through our extensive network of authorized local distributors, and industry leading warranty programs. Because we offer more than just compressed air equipment, we can provide solutions that keep you running, protect your production objectives, and save you money.



2








Small Footprint = Cost Savings

Compact, Quiet Compressors

Nearly Silent Noise Levels

The Gardner Denver LRS-Series compressor designs feature high-quality, sound-insulating enclosure panels and a low-noise, thermostatically-controlled, motor-driven fan. These components reduce the noise to whisper-quiet levels and eliminate the need for a separate compressor room, saving money on installation costs.

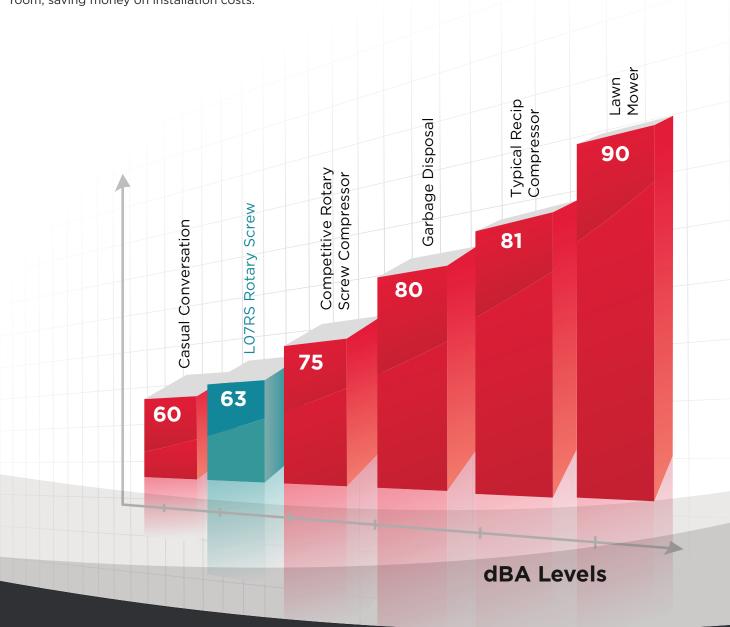

Reduce Energy. Maximize Efficiency. Save Money.

Perfect Response to Your Individual Air Demand

Variable speed compressors from Gardner Denver can efficiently and reliably handle the varying air demand. The right variable speed compressor in the right application delivers significant energy savings and a stable air supply at constant pressure.

Minimize Your Energy Consumption

The largest cost component of a compressor during its lifetime is the power required to operate it. Maximum efficiency at any level of demand cuts energy costs and saves money.



Energy Gavings

Variable Speed Drive 100 ENERGY SAVINGS 90 80 70 60 50 40 30 20 10 70 20 30 40 50 60 80 100 90 % CAPACITY VSD — Load / No Load 1gal/cfm


High Efficiency TEFC Motor

Low Life Cycle Costs

Market Leading Energy Savings Lowest kW/100 CFM

Pressure Drop

Specific Power

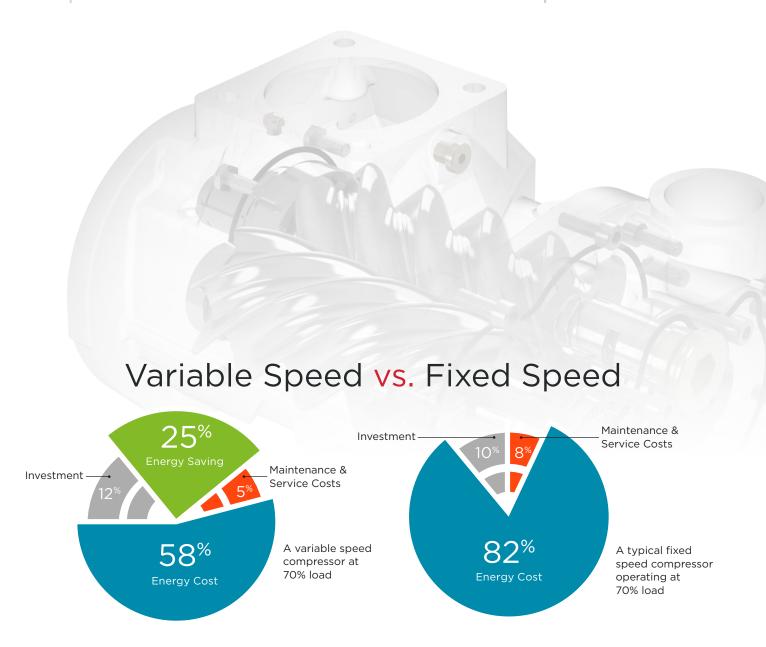

Using a variable speed compressor can easily save 25% energy by using just the right amount of energy required to do the job and no more.

Get in Touch with the Next Generation of Compressor Controllers

State-of-the-Art

Gardner Denver completes its industry leading compressor packages with state-of-the-art touch screen controllers: the GD Pilot and Governor™. Featuring cutting edge graphics that provide necessary compressor data and full color schematics in seconds, the Governor™ is now available on select L-Series and LRS-Series compressors models.

Governor™ Touchscreen Controller Features

- Available on L15RS-L290RS compressor models
- User-friendly navigation with state-of-the-art graphics and design
- Machine status available on a 7-inch, full color touchscreen display for L30RS-L290RS and a 4.3-inch display for L15RS-L29RS
- Detailed schematics at your fingertips
- Advanced machine diagnostics
- Data logging and iConn connection
- Web server to allow access to the Governor[™] from your desktop





GD Pilot Controller Features

- Available on L07RS-L11RS compressor models
- Real time clock
- Second pressure setting
- Discharge/line/network pressure data displayed
- Advanced fault history log
- Programmable inputs and outputs
- Auto restart after power failure
- RS485-Modbus RTU standard



Protect your investment.

your equipment through our industry leading warranty programs.



Best Warranties in the Industry

The engineering philosophy of Gardner Denver is to design high quality, reliable equipment and help you protect your new equipment to give you peace of mind. We offer a good, better, and best approach to warranty programs.





Standard Warranty

Protects your newly purchased equipment if you encounter defects in materials or workmanship for 1 year and provides 2 years of parts and labor coverage for most major components.

Platinum 10-Year Extended Warranty

The Platinum 10-Year Extended Warranty covers everything in the Standard Warranty as well as defects in materials or workmanship of the airend parts for 10 years and provides 5 years coverage on major components. The equipment must be maintained on-schedule in accordance with the requirements of the warranty statement and the operations manual.

Platinum+ Full Package Warranty

Adds to the coverage of the Platinum 10-Year Extended Warranty and changes to a 5-year renewable service agreement with one of our factory-trained distributors. By paying for the additional protection, you gain peace of mind, a partnership with your trusted distributor, and the added coverage of wear items and other package components.

LO7RS-L29ORS ROTARY SCREW COMPRESSOR

	DRIVE MOTOR		50 HZ				60 HZ				NOISE			DIMENSIONS
MODEL			NOMINAL PRESSURE		FAD		NOMINAL PRESSURE		FAD¹		LEVEL ²	WEIGHT ³		DIMENSIONS L × W × H
	HP	KW	PSIG	BAR	ACFM	M³/MIN	PSIG	BAR	ACFM	M³/MIN	DB(A)	LBS	KG	IN. (MM)
L07RS	10	7	100 130 190	6.9 9.0 13.1	44.5 35.7 29.3	1.26 1.01 0.83	110 130 190	7.6 9.0 13.1	42.9 37.6 27.9	1.22 1.07 0.79	63	489	222	_ 27 × 25 × 41 (686 × 635 × 1041)
L11RS	15	11	100 130 190	6.9 9.0 13.1	63.9 55.1 44.5	1.81 1.56 1.26	110 130 190	7.6 9.0 13.1	62.1 56.9 43.5	1.76 1.61 1.23	64	509	231	
L15RS	20	15	NA	NA	NA	NA	110 130 190	7.6 9.0 13.1	88.3 79.7 59.2	2.50 2.26 1.68	74	945	429	- 32 × 35 × 50 (881 × 820 × 1274) -
L18RS	25	18	NA	NA	NA	NA	110 130 190	7.6 9.0 13.1	106.4 95.0 77.5	3.01 2.69 2.20	74	945	429	
L22RS	30	22	NA	NA	NA	NA	110 130 190	7.6 9.0 13.1	124.6 116.0 90.7	3.53 3.29 2.57	74	945	429	
L23RS	30	22	100 130 190	6.9 9.0 13.1	145.8 132.1 102.1	4.13 3.74 2.89	110 145 190	7.6 10.0 13.1	145.5 123.5 102.1	4.12 3.50 2.89	68	1501	681	- 53 × 35 × 64 (1345 × 880 × 1612) -
L26RS	35	26	100 130 190	6.9 9.0 13.1	169.2 154.0 125.7	4.79 4.36 3.56	110 145 190	7.6 10.0 13.1	168.9 144.9 125.7	4.78 4.10 3.56	70	1561	708	
L29RS	40	30	100 130 190	6.9 9.0 13.1	191.4 171.6 134.9	5.42 4.86 3.82	110 145 190	7.6 10.0 13.1	190.9 159.0 134.9	5.41 4.50 3.82	70	1570	712	
L30RS	40	30	100 125 145	6.9 8.6 10.0	194.2 179.0 169.8	5.50 5.07 4.81	110 125 145	7.6 8.6 10.0	194.3 182.5 170	5.51 5.17 4.82	68	2039	925	- 68 × 37 × 66 (1722 × 920 × 1659) -
L37RS	50	37	100 125 190	6.9 8.6 13.1	238.3 221.0 182.5	6.75 6.26 5.17	110 125 190	7.6 8.6 13.1	238.5 224.6 182.5	6.75 6.36 5.17	69	2099	952	
L45RS	60	45	100 125 190	6.9 8.6 13.1	277.5 258.0 216.0	7.86 7.31 6.12	110 125 190	7.6 8.6 13.1	277.0 262.3 216.3	7.85 7.43 6.13	71	2147	974	
L55RS	75	55	110 125 145	7.5 8.6 10.0	361.3 341.1 318.6	10.2 9.7 9.0	110 125 145	7.6 8.6 10.0	364.7 344.0 318.0	10.33 9.74 9.00	69	3732	1693	85 × 49 × 78 (2159 × 1222 × 1971)
L75RS	100	75	110 145 190	7.5 10.0 13.0	463.4 410.5 362.5	13.1 11.6 10.3	110 125 190	7.6 8.6 13.1	473.4 448.4 367.8	13.41 12.70 10.41	72	3895	1767	
L90RS	125	90	100 125 190	6.9 8.6 13.1	612.8 571.5 450.4	17.36 16.19 12.76	100 130 190	7.6 9.0 13.1	627.3 593.0 464.8	17.76 16.79 13.26	77	6102	2768	- 92 × 54 × 81 (2337 × 1372 × 2039) -
L110RS	150	110	100 125 190	6.9 8.6 13.1	731.1 679.2 551.4	20.71 19.24 15.62	100 130 190	7.6 9.0 13.1	742.7 704.6 581.5	21.03 19.95 16.46	77	6107	2770	
L132RS	180	132	100 125 190	6.9 8.6 13.1	802.4 747.7 609.3	22.73 21.18 17.26	100 130 190	7.6 9.0 13.1	819.7 781.4 642.4	23.21 22.13 18.19	78	6142	2786	
L160RS	215	160	100 125 190	6.9 8.6 13.1	1116.5 1045.7 836.8	31.62 29.61 23.70	100 125 190	6.9 8.6 13.1	1119.2 1049.8 819.7	31.69 29.73 23.21	76	9652	4378	115 × 82 × 86 (2907 × 2071 × 2193)
L200RS	270	200	100 125 190	6.9 8.6 13.1	1368.0 1299.1 1051.9	38.74 36.79 29.79	100 125 190	6.9 8.6 13.1	1365.2 1291.3 1027.3	38.66 36.57 29.09	78	10082	4573	
L250RS	340	250	100 125 190	6.9 8.6 13.1	1477.3 1401.0 1138.9	41.83 39.67 32.25	100 125 190	6.9 8.6 13.1	1466.0 1369.8 1091.6	41.51 38.79 30.91	79	10293	4669	
L290RS	390	290	100 125 190	6.9 8.6 13.1	1620.7 1542.6 1250.4	45.89 43.68 35.41	100 125 190	6.9 8.6 13.1	1605.6 1504.0 1201.0	45.47 42.59 34.01	81	10326	4684	

¹⁾ Data measured and stated in accordance with ISO1217, Ed. 4, Annex C & Annex E at the following conditions:

Air Intake Pressure 1 bar A, Air Intake Temperature 20° C, Humidity 0% (Dry).

2) Noise levels are for air-cooled and water-cooled models, and measured in free field conditions in accordance with ISO 2151, tolerance +/- 3 dB.

³⁾ Weights are for air-cooled models.

The leader in every market we serve by continuously improving all business processes with a focus on innovation and velocity



1800 Gardner Expressway Quincy, IL 62305 www.gardnerdenver.com









©2024 Industrial Technologies and Services, LLC Printed in U.S.A. GS-L07RS-L290RS 14th Ed. 6/24

